


HÄRTE PRO

ELR TUBULAR MOTOR-TY OPERATING MANUAL

Company reserves the right to change product design and specifications without prior notice then, photos are for reference only. H12221 A/0


Pairing method 1: Motor enters pairing mode when powered on, and exits after 5s (no any prompts).

Pairing method 2: Repeat the code pairing step to eliminate the current code. One motor can store up to 5 channels, adding a new channel will only cover the first channel.

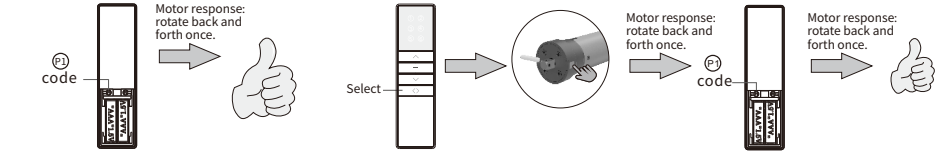


1. Select the channel that will be paired;
2. Press [Set] button on motor;
3. Within 10s after motor stops, press [Code] button;


Clear pairing: Clear all pairing on the motor:

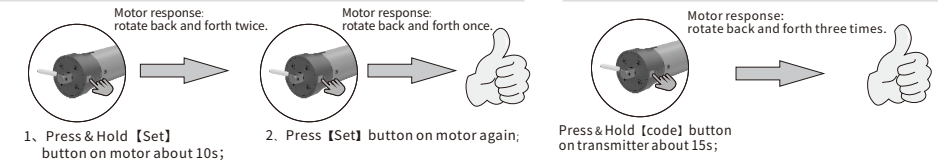


Stop when encountering resistance: enabled by default. Repeated operation is to open or close this function.

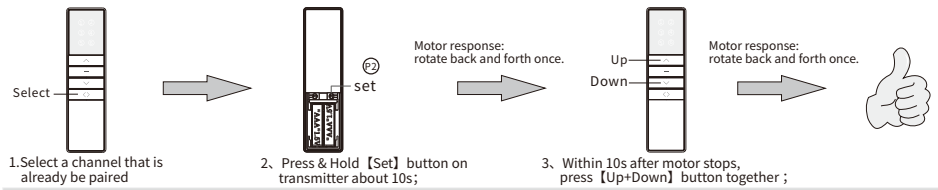


Rebound when encountering resistance: enabled by default. Repeated operation is to open or close this function. (Default rebound about 30cm)

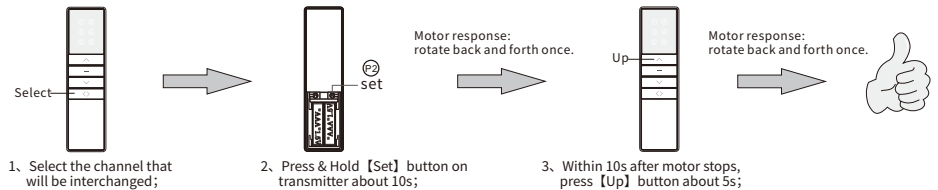

Default is continuous moving. After switching to inching moving, press & hold [Up] or [Down] button about 2s, motor will continuously moves:

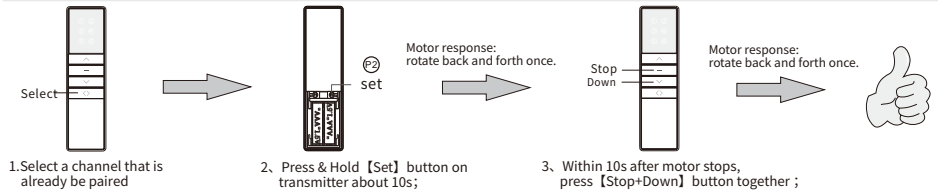


Lightly lift to up or down: off by default. After turned on, when blinds are 10cm within top limit, lift the blinds to down. when blinds are out of 10cm, lift the blinds to up.

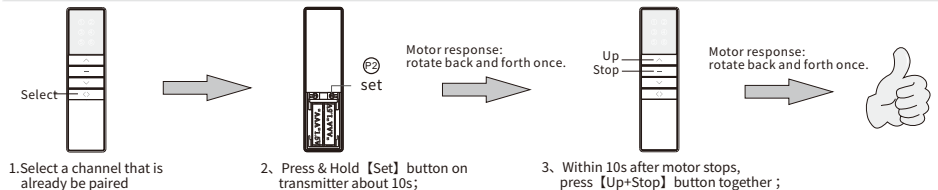


Fabric finishing: off by default. After turned on, when blinds down normally and stop, the blinds will rises a little to make fabric neat, not plicated.


Copy: Add a new channel to control motor. (No need to touch motor):

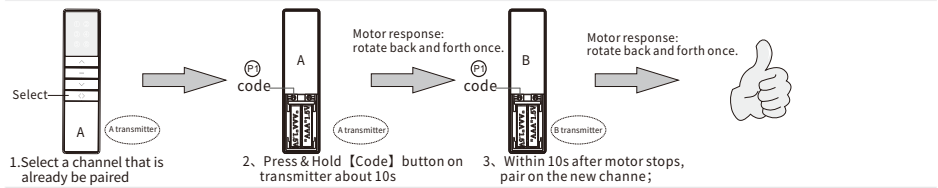


Reset direction: Reset motor direction. Such as: before reset, press transmitter up button, blinds run down. After reset, press transmitter up button, blinds run up.

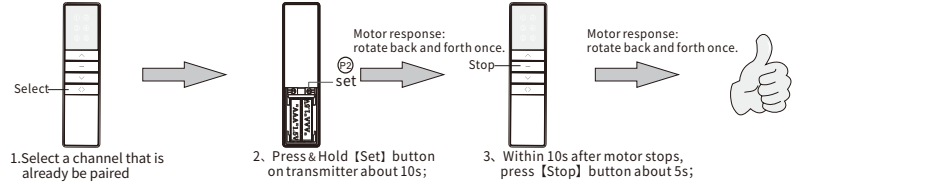

Adjusting Limits: When you press [Up] or [Down] button, the blinds will move up or down and stop automatically at the appointed position.

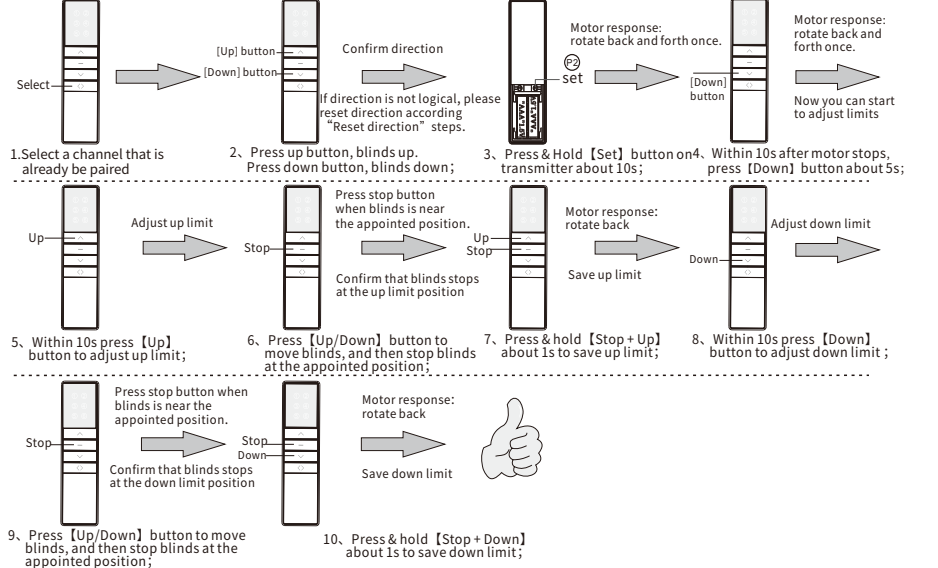


Adjust the third limit: Repeat the operation once to eliminate the third limit:

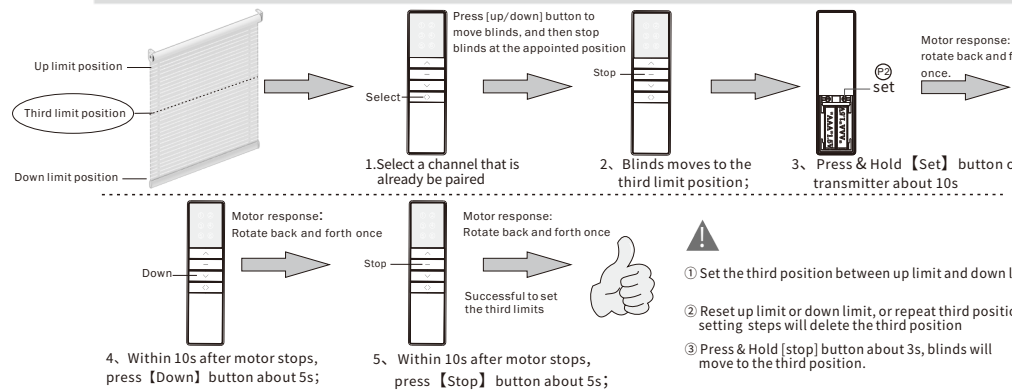


- ① Set the third position between up limit and down limit.
- ② Reset up limit or down limit, or repeat third position setting steps will delete the third position
- ③ Press & Hold [stop] button about 3s, blinds will move to the third position.


Reset Wi-Fi:

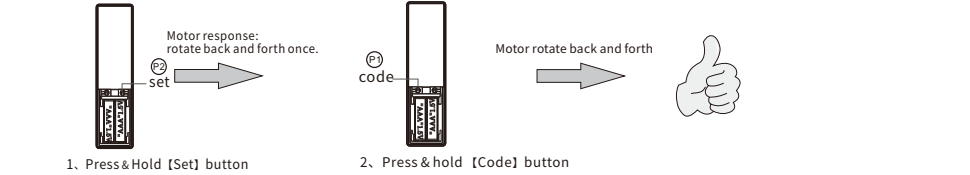

Configure network method:

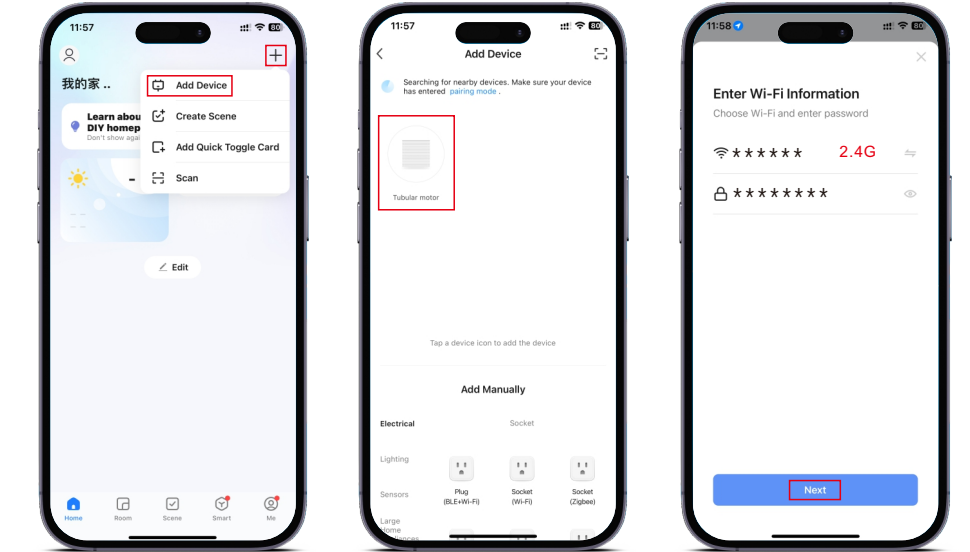

01. Open Tuya App, click "+" click "Add Device"
02. Waiting for device search
03. Input Wi-Fi name and password, then click "next"

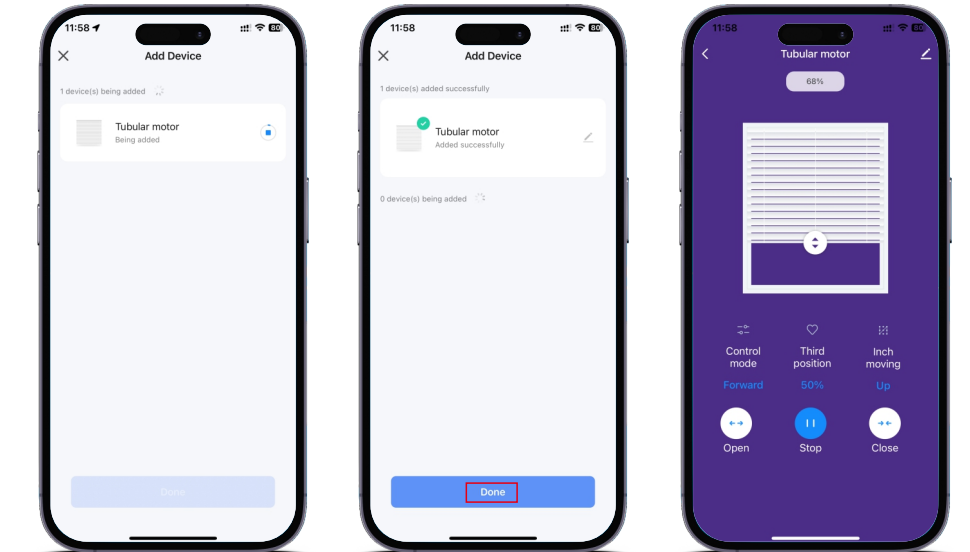

04. Waiting for connecting.
05. After added successfully, click "done"
06. Operation interface